



Half Seat Pet Hammock



Installation and Washing Instructions

Thank you for purchasing the Half Seat Pet Hammock. Your passengers and your four legged best friends will be very comfortable and your backseat will remain clean and protected. Your Half Seat Pet Hammock is fast and easy to install.

Front and back seat head restraint posts are required for installation.

Your hammock is completely reversible and can be installed on either the passenger or the driver's side of the back seat. Choose the passenger side, or driver's side, to install the hammock.

Step 1:

Remove the hammock from the plastic bag. Orient the hammock so that flap "A" is hanging over the side edge of the back seat. (Note that depending on what side of the back seat you want your hammock, you may have to turn the hammock inside out.)

Step 2:

Locate the two sets of side release buckles and webbing straps ("B" and "C") that are on the top edges of the hammock. Squeeze to open the side release buckles. Loop the webbing around the front seat head restraint post ("B") and reattach the two ends of the side release buckles. Note that you may need to raise the head restraint to more easily loop the webbing around the posts. Repeat to secure the hammock to the back seat head restraint post ("C").

Step 3:

Locate the webbing and side release buckles "D" and "E". Note that if these webbing and buckles are attached to the inside of the hammock (that is, where the dog would sit) you must move webbing...
continued on next page...



Installing Your New Waterproof Bucket Seat Protector




Step 3 Continued...:

... and buckles “D” and “E” to the outside of the hammock. Attach the front webbing strap (“D”) to the front seat head restraint posts. Repeat to secure the hammock to the back seat head restraint posts (“E”).

Step 4:

Loosen, or tighten, the webbing straps labeled “B”, “C”, “D” and “E” through the side release buckles depending on how you want the hammock to sit in your vehicle. Note that the webbing strap “F” adjusts the hammock panel that divides where your dog will be and where your rear seat passengers will sit. Loosen, or tighten, this webbing (“F”) to your desired tension.

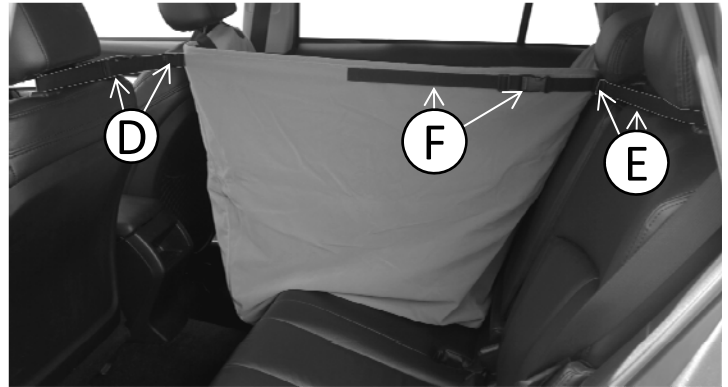

Washing Instructions:

The Half Car Seat Pet Hammock is fast and easy to clean.

To avoid damage when cleaning, reattach all of the side release buckles. Wash and dry the hammock separately from other items. Machine wash with cold water on a gentle setting using a mild laundry detergent, such as Woolite. Tumble machine dry on a cool to warm setting. Do not use bleach, and do not dry clean as these will damage the upholstery grade microfiber fabric.

The hammock can also be hosed off using a garden hose. Either hang the hammock to dry, or tumble machine dry on a cool to warm setting.

In the event of a pet ‘accident’ we recommend removing the hammock from the vehicle and using an enzyme based urine treatment, such as “Urine Off”, directly on the accident. Allow the enzyme to dry completely before machine washing and drying the Bed. Should urine odors persist you can reapply the treatment and/or contact the enzyme manufacturer for further recommendations.



If you had a great experience with your new Half Car Seat Pet Hammock please tell your friends. If you didn't, please tell us at: info@floppyearsdesign.com.