



INSTALLING YOUR ZIPPERED CAR HAMMOCK & WASHING INSTRUCTIONS



Thank you for purchasing the Zippered Car Hammock. Your four legged best friend will enjoy the Hammock, and your backseat will remain clean and protected for years to come.

Installing Your Zippered Car Hammock:

The Zippered Car Seat Hammock installs over the backseat of your vehicle and requires front and back seat Headrest posts to install.

Your Hammock is reversible. One side is a durable, but soft and comfortable, Microfiber upholstery grade fabric. The reverse side is a heavy duty Berber® Fleece. You need to decide which side you, and your dog, will sit on.

The zipper is there so that you can easily convert the hammock to a seat cover allowing people to sit in the backseat.

Step 1:

Installing, and removing, the Hammock is quick and easy.

Remove the Hammock from the plastic bag. Put the side of the Hammock that you want to sit on facing up. Position the Hammock on the backseat so the zipper will go against the back of the front seats (as shown in the photo).

Step 2:

Locate the two Side Release Buckles that are on the top edge of the Hammock above the zipper. If necessary, raise the driver and passenger Headrests so you can get to the Headrest posts underneath. Undo the two Side Release Buckles.

Loop the webbing around the front seat Headrest posts. Reattach the two ends of the Side Release Buckles.

Step 3:

The top of the Hammock may hang too far down from the Headrest posts. Adjust the webbing that goes around the Headrest posts to your desired tension. Adjusting the webbing looser, or tighter, also adjusts the height of the Hammock between the two front seats. Some people prefer to keep the Hammock relatively tight between the two front seats to create a more substantial barrier between the front and back seats.

Step 4:


Locate the two Side Release Buckles that are on the top edge of the backseat part of the Hammock. Undo these two Side Release Buckles. Just as with the Headrests on the front seat, loop the webbing around the posts that are under the Headrests on the backseats. Reattach the two ends of the Side Release Buckles.



Adjust the height of the Hammock along the top of the backseat by adjusting the webbing through the Side Release Buckles.

Step 5: People Sitting In The Backseat

The Hammock converts into a seat protector where people can sit in the backseat with the Hammock in place. To convert the Hammock to allow people to sit in the backseat, undo the two Side Release Buckles near the zipper (these Side Release Buckles ensure the zipper does not open). Unzip the zipper. Allow the quilted part of the Hammock to fall down over the backseat where people will put their feet. You can leave the top part of the Hammock attached to the front seat Headrest posts, or you can remove this part of the Hammock. (Always reattach the Side Release Buckles whenever the zipper is closed.)

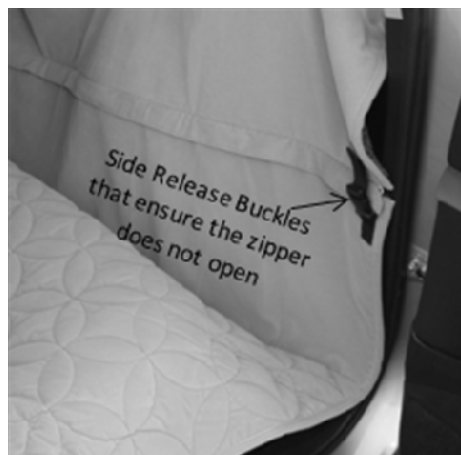

Step 6:

The Hammock has openings that allow seat belts to be passed through the Hammock (an extra piece of fabric connected to the seat belt openings ensures that sand and dirt doesn't go through the Hammock into the backseat).



Washing Instructions:

The Zippered Car Hammock is easy to clean.

To avoid damage, fully close the zipper and reattach all of the Side Release Buckles. Wash the Hammock with cold water on a gentle setting using a mild laundry detergent, such as Woolite. Wash and dry separately from other items. Tumble machine dry on a cool to warm setting. Do not use bleach, and do not dry clean as these will damage the upholstery grade fabrics.

Note that the Hammock is large, and is heavy when wet. You may consider using a commercial grade front load washer and dryer.

Alternatively, the Hammock can be hosed off using a garden hose. Either hang the Hammock to dry, or tumble machine dry on a cool to warm setting.

In the event of a pet 'accident' we recommend using an enzyme based urine treatment, such as "Urine Off", directly on the accident. Allow the enzyme to dry completely before machine washing and drying the Bed. Should urine odors persist you can reapply the treatment and/or contact the enzyme manufacturer for further recommendations.



--